

Priority #5
D. Bell
4/25/01

367.39057X00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): John BOAKES, et al
Serial No.:
Filed: October 10, 2000
Title: AN ANTENNA ASSEMBLY AND METHOD OF
CONSTRUCTION
Group:

1c931 U.S. PRO
09/684662
10/10/00

LETTER CLAIMING RIGHT OF PRIORITY

Honorable Commissioner of
Patents and Trademarks
Washington, D.C. 20231

October 10, 2000


Sir:

Under the provisions of 35 USC 119 and 37 CFR 1.55, the
applicant(s) hereby claim(s) the right of priority based on
Great Britain Patent Application No.(s) 9923958.4 filed
October 8, 1999.

A certified copy of said Great Britain Application is
attached.

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP



Carl I. Brundidge
Registration No. 29,621

CIB/nac
Attachment
(703) 312-6600



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

Jc931 U.S. PTO
09/684662



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated


22 AUG 2000

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

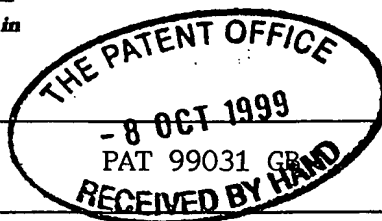

1. Your reference

2. Pater
(The 1

9923958.4

- 8 OCT 1999

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA MOBILE PHONES LIMITED
KEILALAHDENTIE 4
02150 ESPOO
FINLAND

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

7406747 001

4. Title of the invention

AN ANTENNA ASSEMBLY AND METHOD
OF CONSTRUCTION

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

NOKIA IPR DEPARTMENT
NOKIA HOUSE
SUMMIT AVENUE
FARNBOROUGH
HAMPSHIRE
GU14ONG UK

7577638001

Patents ADP number (if you know it)

7577638 001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 14

Claim(s) 4

Abstract 1

Drawing(s) 4 + 4

10. If you are also filing any of the following, state how many against each item

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

8/10/99

12. Name and daytime telephone number of person to contact in the United Kingdom

EAN DAVIES 01252 865000

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

- 2 JUN 2000

RULE 97
NEWPORT

The
Patent
Office

7/77

Statement of inventorship and of right to grant of a patent

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference PAT 99031 GB
2. Patent application number 9923958.4
(if you know it)
3. Full name of the or of each applicant NOKIA MOBILE PHONES LIMITED
4. Title of the invention AN ANTENNA ASSEMBLY AND METHOD
OF CONSTRUCTION
5. State how the applicant(s) derived the right
from the inventor(s) to be granted a patent BY VIRTUE OF SECTION 7(2)(c).
6. How many, if any, additional Patents Forms
7/77 are attached to this form?
(see note (c))
7. I/We believe that the person(s) named over the page (and on
any extra copies of this form) is/are the inventor(s) of the invention
which the above patent application relates to.

SignatureDate

HELEN HAWS, AGENT FOR THE APPLICANT
8. Name and daytime telephone number of
person to contact in the United Kingdom EAN DAVIES 01252 865000

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

18742 55 72

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

JOHN BOAKES

52 CHARLES STREET
BERKHAMPSTEAD
HERTS
HP4 3DJ

7915408001

Patents ADP number (if you know it):

ALAN JOHNSON

10 BARNES ROAD
FRIMLEY
SURREY
GU16 5BZ

7915416001

Patents ADP number (if you know it):

PETER SHEAD

35 MAPLE DRIVE
KINGSWORTHY
WINCHESTER
HANTS
SO23 7NG

7915424001

Patents ADP number (if you know it):

Reminder

Have you signed the form?

PAT 99031 GB

AN ANTENNA ASSEMBLY AND METHOD OF CONSTRUCTION

This invention relates to an antenna assembly, and its method of construction.

- 5 It is particularly suitable for use with portable telecommunications devices such as portable radio telephones.

Recently, advances in miniaturisation technology have enabled smaller and smaller portable radio telephones to be produced. In particular, more efficient
10 electronics have enabled lower-powered batteries to be used, and in conjunction with improved battery technology, it is now possible to produce portable radio telephones which can easily be carried unobtrusively about the person.

- 15 An area of telephone technology which has not benefited so greatly from miniaturisation is antenna design. Generally, an antenna has to be a certain size in order to function adequately. This has made it difficult if not impossible for antennas to shrink at the same rate as other elements of portable radio telephones.

20 Traditional antenna solutions have taken the form of extendible whip or rod antennas which may be withdrawn from the body of the telephone for use, or helical antennas which are smaller than an extended rod antenna, but which permanently protrude from the telephone.

25 According to a first aspect of the present invention, there is provided an antenna assembly for a telecommunication apparatus, comprising : a conductive element defining a planar antenna; and a flexible member arranged to carry the conductive element.

According to a second aspect of the present invention, there is provided an antenna assembly for a communication device comprising a flexible member carrying a conductive track in a generally planar equilibrium configuration.

5

Recently, internal planar antennas have become feasible, but as telephones become ever smaller, the effectiveness of the antenna in both transmit and receive modes can be reduced by the antenna being concealed by the user's hand.

10

Therefore, as the bodies of portable radio telephones become smaller, external antenna assemblies become increasingly out of proportion, and internal antennas cannot function as efficiently.

15 Advantageously, the present invention enables better antenna performance from a given volume of antenna than other antenna structures such as helices and rod antennas. Being flexible, it is also resistant to damage caused by rough handling.

20 The antenna element may take several forms. It may be produced by selectively bending and shaping a suitable wire, such as stainless steel or spring steel wire. Alternatively, the antenna pattern may be produced by stamping out a suitable pattern from a planar sheet of steel.

25 Preferably the antenna element is embedded in the flexible member. This protects the potentially delicate antenna from damage.

The flexible member is preferably flat and planar, and the flexible member is configured so that the antenna is held in a generally planar equilibrium. This
30 ensures that the antenna is flexible enough to avoid damage caused by rough

handling, but the position is stable so that consistent performance can be attained.

5 Preferably the antenna is disposed on a substrate. This may be achieved by etching techniques as used to produce PCBs, or by printing the antenna onto the substrate using a conductive ink.

10 An advantage of carrying the antenna on a substrate is ease of handling, and prevention of damage to the antenna element during subsequent operations.

In order to alleviate the problems of compressive and tensile forces acting on the antenna element when the flexible member bends, it is preferable to dispose the antenna along the midpoint or central bend axis of the flexible member. In this way, the potentially damaging forces have the least effect.

15 This is desirable whether the antenna is disposed on a substrate or not.

In the case when the antenna is disposed on a substrate, it is preferable to sandwich the antenna element between its substrate and another similarly dimensioned piece of substrate material, to ensure that the antenna is disposed on the central bend axis.

20 In order to maximise the bond between the two halves of the flexible member when a substrate is used, it is preferable to provide one or more apertures in the substrate so that cohesive bonding can occur between the portions of material providing the flexible member. If two layers of substrate are used, then both layers can be perforated.

25 The antenna assembly preferably comprises a rigid base member to facilitate attachment to a telecommunication apparatus. This base member also provides a means for electrical connection of the antenna.

Some suitable materials for the various parts of the antenna assembly are :

- | | | |
|---|---------------------|--|
| | Substrate : | Polyester |
| 5 | Flexible member : | Thermo plastic elastomer |
| | Rigid Base Member : | Glass Filled (10 – 15%) Polypropylene. |

According to a third aspect of the present invention, there is provided a method of producing an antenna assembly comprising the step of: encapsulating a
10 planar antenna element within a flexible member.

Preferably, the antenna is first disposed on a substrate.

Injection moulding techniques are preferably employed to overmould each
15 side of the substrate so that the entire substrate is encapsulated, except for a small portion which allows for electrical connection to the antenna.

Preferably, the overmoulding on each side extends slightly beyond the outer edge of the substrate to ensure that cohesive bonding occurs between the
20 two portions of the flexible member. This advantageously provides a good seal around the antenna assembly.

For a better understanding of the present invention, and to understand how the same may be brought into effect, reference will now be made to the
25 appended drawings in which :

Figure 1 shows a portable radio telephone incorporating an antenna assembly according to an embodiment of the invention;

30 Figure 2 shows a substrate material on which is disposed an antenna;

Figure 3 shows a perspective view of an antenna assembly according to an embodiment of the invention;

- 5 Figure 4 is a plan view showing some internal features of an antenna assembly according to an embodiment of the invention;

Figure 5 shows an exploded cross-sectional view of an antenna assembly according to a first embodiment of the invention;

10

Figure 6 shows an exploded cross-sectional view of an antenna assembly according to a second embodiment of the invention; and

- 15 Figure 7 shows an alternative antenna element according an alternative embodiment of the invention.

An embodiment of an antenna assembly according to the invention in use in a portable radio telephone 10 is shown in Figure 1. Here the antenna assembly 100 can be seen protruding from the upper surface of the telephone.

20

- The telephone is in all other respects similar to prior art telephones. As previously mentioned, the rapid increase in miniaturisation of portable radio telephones has resulted in devices which are more likely to be carried in pockets than in handbags or briefcases. In the future, so-called wearable
25 telephones may well be designed to be worn on clothing in the manner of a brooch or badge, for instance.

- The antenna assembly of the present invention is intended to be generally planar, flexible and to protrude from a surface of the telephone 10. This offers
30 advantages in that: it offers increased performance over an internal antenna

of similar proportions; and, being flexible, it is less likely to be damaged if the telephone is handled roughly.

5 In order to construct an antenna assembly according to embodiments of the invention, a suitable antenna design is required. Any number of possible configurations exist, and the actual choice of antenna is dependent on the operating frequency and bandwidth, for instance.

10 The antenna is planar in that it resides on a 2-dimensional surface, as opposed to a rod antenna which can, in many regards, be considered as a 1-dimensional element, or a helical antenna which is defined in terms of 3-dimensions.

15 Figure 2 shows an antenna disposed on a substrate. The antenna is produced on a substrate 110, using conventional copper etching techniques which are well known in the art. The substrate 110 is chosen to be flexible. A particularly suitable substrate is polyester. Another suitable substrate is polyamide. The pre-etched substrate consists of a layer of copper, which is adhesively bonded to the polyester substrate. Once the etching is complete,
20 the waste copper has been removed and all that remains is one or more copper tracks or traces defining the antenna design 120 firmly attached to the polyester substrate 110.

25 As an alternative to etching the antenna out of copper, or other metal, it is also possible to produce the antenna 120 by printing the antenna design, using conductive ink, onto the substrate 110. Etching, however, is presently the preferred solution, as this technology is well proven.

30 The next stage is the addition of a more rigid material at the base of the antenna assembly to enable it to be fixed to the telephone body. This also

serves as a reference point for the next stage of injection moulding. The material chosen for this element has to provide mechanical strength to the base of the antenna assembly. It also has to provide a good bond to the material providing the outer covering of the antenna assembly.

5

A particularly suitable material for the base is 10 – 15% Glass Filled Polypropylene. This provides not only the required rigidity, but gives a good bond between the elements which make up the antenna assembly.

10 To add the base material, the substrate is clamped firmly in position in a mould. Locating holes have previously been provided in the substrate. The base material is then injected into the mould. Once the polypropylene has solidified, the mould is removed, in readiness for the next step.

15 The rigid base forms a solid bar at the base of the antenna assembly, which extends along its entire width. This provides both stability to the antenna assembly, and means for it to be connected to the telephone.

The small protruding tab 130 at the base of the substrate 110 is left
20 uncovered by the moulding process, as this forms the antenna connection to the transceiver of the telephone 10.

If the antenna assembly were to be used at this stage, it would be very flimsy, and the tracking 120, i.e. the copper traces, would be susceptible to damage.

25 It is therefore desirable to encapsulate the antenna and substrate in a protective material.

Such a material should be durable, flexible and relatively simple to mould around the substrate. A particularly suitable type of material is a Thermo
30 Plastic Elastomer (TPE), e.g. Evoprene. This material is rather rubbery and

protects the underlying substrate by both encapsulating it, and thus protecting the traces from scratching, and providing a cushioning effect to protect the antenna assembly from any rough handling.

- 5 The process used to form the outer covering is a two-stage injection moulding procedure. Firstly, the substrate and base are securely clamped. A preferred method of securing the part is through use of a vacuum arrangement. Secondly, the mould is introduced over the clamped substrate and securely fastened. Thirdly, the molten TPE material is injected into the mould.

10

Once the TPE has solidified and cooled, the mould is removed. The antenna and substrate are now completely covered on one side. The process is then repeated to cover and protect the other side of the substrate.

- 15 Figure 3 shows the completed antenna assembly, including the rigid base portion 140, and the flexible antenna portion 150 protruding from it.

- As can be seen in Figure 4, which shows the flexible part 150 of the antenna assembly and excludes the rigid base portion, the TPE material 160 is
- 20 moulded to the substrate 110 in such a way that it extends slightly beyond the outer edge, or circumference, of the polyester substrate material. This is performed on both sides of the antenna. This is done to provide a tight seal around the antenna. The cohesive bonding between the TPE 160 on each side is greater than the adhesive bonding between the polyester 110 and the
- 25 TPE. Even though the bond between TPE and polyester is strong, there may be a tendency for the TPE to peel away from the polyester if the TPE layer ended at the same point as, or inside the circumference of the polyester substrate layer.

Additionally, holes may be provided through the substrate material so that there are points inside the circumference of the substrate where cohesive bonding between the two portions of TPE 160 can occur. These holes should of course be positioned so as not to interfere with the antenna tracking.

5

Figure 4 also shows the design of the antenna 120 used in this particular embodiment. In this case, it is a fractal-like antenna, the particular dimensions of which make it suitable for use with a telephone operable according to the Japanese PDC 800 MHz standard. However, any antenna having suitable
10 electrical characteristics may be employed.

The choice of materials can be difficult as they all have different, sometimes conflicting, properties, especially melting point, which makes careful control of the moulding process important.

15

For instance, the polyester used for the substrate has a lower melting point (90 – 100 °C) than the other materials which make up the antenna. Unless careful control of the moulding process is exercised, the polyester may be prone to damage when the polypropylene or TPE, which have higher melting
20 points (130 °C and 120 – 130 °C respectively), is moulded onto the substrate material. It is found that careful control of the moulding process, particularly the temperature of the injected TPE ensures that the polyester is undamaged. Polyester has other benefits which make its use desirable in this application. In particular, polyester is transparent, whereas polyamide, an alternative
25 substrate, is opaque, and the transparency of the substrate is used to aesthetic effect in the finished product.

In particular, the TPE layers may be configured to have a non-uniform thickness. This allows a portion of the TPE to be moulded such that the
30 antenna tracking is visible through the otherwise opaque TPE layer.

An advantage of this three stage moulding process is that there are no 'finishing' operations required in order to make the antenna assembly ready for use. For instance, an alternative technique, common in moulding, is to provide tabs which are used to locate a part in a mould. After moulding, these superfluous tabs need to be removed. In the case of the antenna assembly discussed above, such tabs would by necessity have to protrude from the edges of the polyester substrate, and would interfere with the seal provided by the cohesive bonding of the two layers of TPE. The process described above requires more time in the moulding activity, but saves time overall, as no finishing is required.

Figure 5 shows an exploded cross-sectional view of the flexible parts 150 of the antenna assembly 100. The substrate 110 and copper layers 120 can be seen to be securely protected within the two layers of TPE 160. The approximate thicknesses of the layers are :

Substrate 110 :	25 – 50 μm
Adhesive 115 :	15 – 25 μm
Copper 120 :	35 μm (1oz)
TPE 160 :	0.5 – 1.2 mm

Although the configuration of Figure 5 provides good protection of the copper tracking 120 from scratching, this particular structure can cause other problems for the copper tracking.

Imagine the antenna assembly of Figure 5 flexing. As it bends, the lower layer of TPE 160b will be in compression, and the upper layer of TPE 160a will be in tension. This is the same for all the intermediate layers, depending on whether they are on one side or the other of the central bend axis. This poses

problems for the copper layer 120, where, with repeated flexing, the copper tracking will be subjected to repeated compressive and tensile stresses. Over a cycle of many such flexes, there is a possibility that the copper tracking will become cracked, severely affecting the antenna performance, or in the worst case, rendering it useless.

One way to solve this problem is through careful control of the thicknesses of the various other layers, particularly the TPE layer 160. However, this level of control introduces further problems into the manufacturing process and makes it needlessly complex.

A preferred solution is the introduction of a further layer of polyester substrate material 110b. This is as shown in Figure 6. Once the etched copper substrate 110a, 115a, 120 is produced as previously described, a controlled amount of adhesive 115b is added to the copper surface 120, followed by a layer of polyester 110b similar in dimensions to the original substrate layer 110a. The entire assembly is then rolled under heat and pressure to securely bond the layers together. The copper tracking 120 is now securely fixed between two similar layers of polyester substrate 110a, 110b. The injection moulding of the rigid base portion 140 and the two TPE 160 layers can then proceed as before.

This configuration, as seen in Figure 6, ensures that the copper tracking 120 is on the central bend axis, and also that it is surrounded by two layers having identical mechanical properties. Any flexing of the antenna 150 means that the copper tracking 120 is less likely to be subject to potentially damaging tensile or compressive forces.

As described previously, perforations may be provided in the two layers of polyester to assist the bonding between the two external layers of TPE 160.

Once the antenna assembly is complete, it can be introduced into the telephone assembly. The antenna assembly is secured by the moulded rigid base portion 140. This is configured to have one or more apertures which
5 coincide with corresponding apertures and structures in other parts of the telephone. Once aligned, screws are used to secure the parts together.

The tab 130 which was left exposed in the earlier moulding processes is used to connect the antenna 100 to the transceiver portion of the telephone.
10 Contact is achieved through the use of a sprung clip which automatically connects as the assembly is screwed together. The clip is positioned within the casing of the telephone such that it contacts the tab 130 when the antenna is secured in position. It is electrically connected to the input/output port of the transceiver. Other connections methods, such as soldering or
15 provision of plugs and sockets could be used instead.

Once assembled, the antenna assembly does not detract significantly from the aesthetic appeal of the telephone, and may even augment it.

20 An alternative to the use of an etched or printed antenna is the use of a formed wire, or stamped antenna pattern. In this case, no substrate is required.

The antenna may be formed by shaping a fairly rigid wire to form the desired
25 antenna pattern. Stainless steel or spring steel are suitable materials. Alternatively, it may be stamped out of a suitable conductive sheet using a custom tool. Again, stainless steel or spring steel are suitable materials. Either method will produce a free antenna, i.e. an antenna with no substrate, which may be used in much the same way as the substrate-based antenna
30 previously described.

Figure 7 shows an antenna 200 produced by one of the above methods. It is clear that it is very similar to the antennas previously described which rely on a substrate, and its electrical characteristics can be controlled so that it
5 operates identically.

One method of producing the antenna assembly around such an antenna element requires pre-moulded TPE material equivalent to one portion 160 of the previously described antenna assembly. The antenna element is then
10 positioned to rest on what will form the inner part of the assembly before the second half of the TPE is injection moulded as previously described.

An alternative method of producing the assembly would be to use a one shot moulding process in which the antenna element is positioned inside a mould
15 before molten TPE is injected to enclose it. This method requires careful positioning of the antenna element within the mould if the previously described problems of compressive and tensile stresses are to be avoided.

In either case, the rigid base member 140 may be added as a further
20 moulding stage, or its function may be performed by a further piece of the telephone assembly.

In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention. In particular, different materials may be selected which still achieve the
25 desired effects. Also, the function served by the rigid base portion 140 could be provided by a non-integral part of the antenna.

The present invention includes any novel feature or combination of features disclosed herein either explicitly or any generalisation thereof irrespective of

whether or not it relates to the claimed invention or mitigates any or all of the problems addressed.

CLAIMS

1. An antenna assembly for a telecommunication apparatus, comprising :

5 a conductive element defining a planar antenna; and

a flexible member arranged to carry the conductive element.
2. An antenna assembly as claimed in claim 1 wherein the conductive
10 element is embedded in the flexible member.
3. An antenna assembly as claimed in claim 1 or 2 wherein the flexible
member is generally flat and planar.
- 15 4. An antenna as claimed in any one of the preceding claims wherein the
conductive element is disposed on a central bend axis of the flexible member.
5. An antenna assembly as claimed in any one of the preceding claims
wherein the conductive element is disposed on a substrate.
20
6. An antenna assembly as claimed in 5 wherein the substrate material
comprises an aperture.
7. An antenna assembly as claimed in claim 5 wherein the conductive
25 element is disposed between the substrate and a second substrate material.
8. An antenna assembly as claimed in any one of the preceding claims
wherein the flexible member is biased towards a generally planar equilibrium.

9. An antenna assembly as claimed in any one of the preceding claims wherein the assembly further comprises a relatively rigid base portion for connecting the assembly to the telecommunication apparatus.
- 5 10. An antenna assembly as claimed in claims 1 to 4 wherein the conductive element is a pre-formed wire.
11. An antenna assembly as claimed in claims 1 to 4 wherein the conductive element is a stamped out pattern from a planar sheet.
- 10 12. An antenna assembly as claimed in claim 10 or 11 wherein the conductive element is stainless steel or spring steel.
13. An antenna assembly as claimed in claims 5 to 9 wherein the
15 conductive element is disposed on the substrate by a process of etching.
14. An antenna assembly as claimed in claims 5 to 9 wherein the conductive element is disposed on the substrate by a process of printing using conductive ink.
- 20 15. An antenna assembly as claimed in claims 5 to 9 wherein the substrate is polyester.
16. An antenna assembly as claimed in claims 5 to 9 wherein the substrate
25 is polyamide.
17. An antenna assembly as claimed in any one of the preceding claims wherein the flexible member is a thermo plastic elastomer.

18. An antenna assembly as claimed in claim 9 wherein the rigid base portion is 10 –15 % glass filled polypropylene.

19. An antenna assembly for a communication device comprising :

5

a flexible member carrying a conductive track in a generally planar equilibrium configuration.

20. A method of producing an antenna assembly comprising the step of:

10

encapsulating a planar antenna element within a flexible member.

21. A method as claimed in claim 20 further comprising the step of :

15

arranging the antenna element to be disposed on a substrate.

22. A method as claimed in claim 20 or 21 wherein the encapsulation is achieved by means of an injection moulding process.

20

23. A method as claimed in 21 or 22 wherein the flexible member is produced by moulding operations performed on opposing sides of the substrate.

24. A method as claimed in claim 23 wherein the moulding on each side extends beyond the outer edge of the substrate.

25

25. An antenna assembly as herein described , with particular reference to the drawings.

26. A method of producing an antenna assembly as herein described, with particular reference to Figures 4 to 6 of the drawings.

ABSTRACT

An antenna assembly for a telecommunication apparatus is disclosed. The antenna assembly has a conductive element defining a planar antenna and a flexible member arranged to carry the conductive element. A method of
5 encapsulating a planar antenna within a flexible member is also disclosed.

Fig 3.

1/4

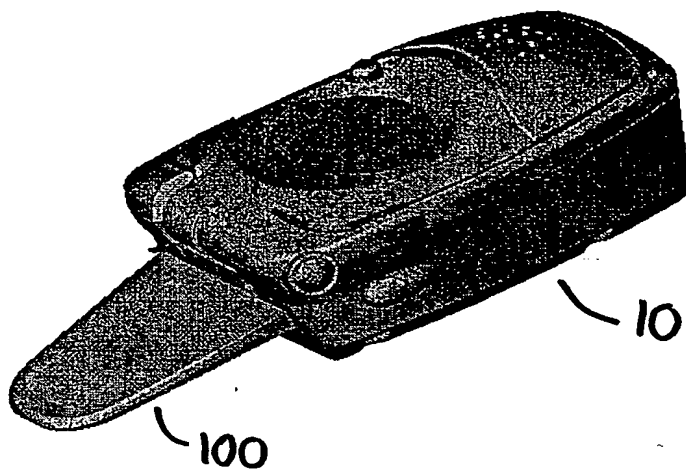


Figure 1

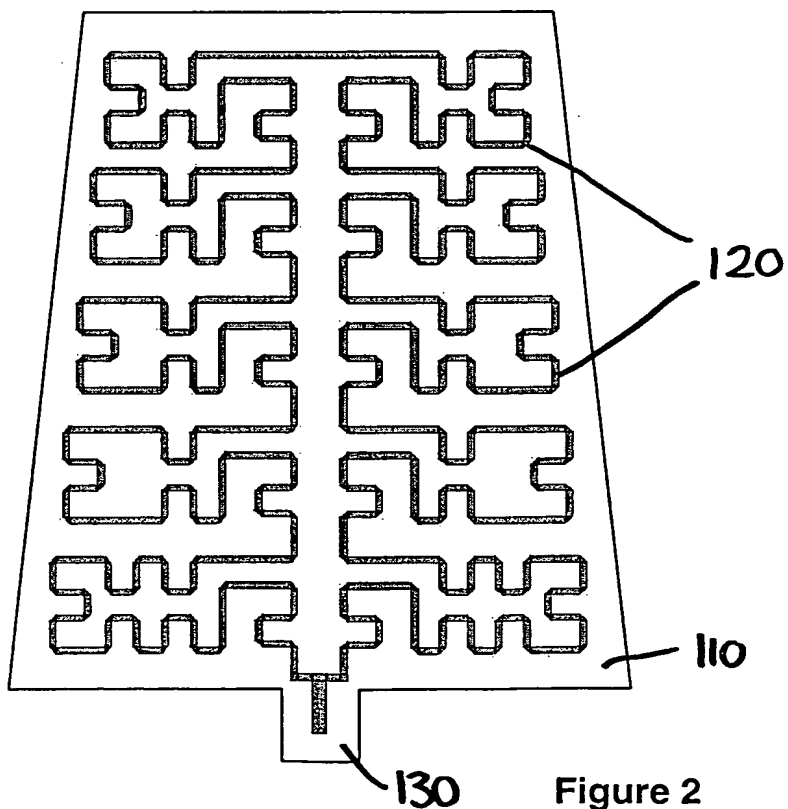


Figure 2

NOT TO BE AMENDED

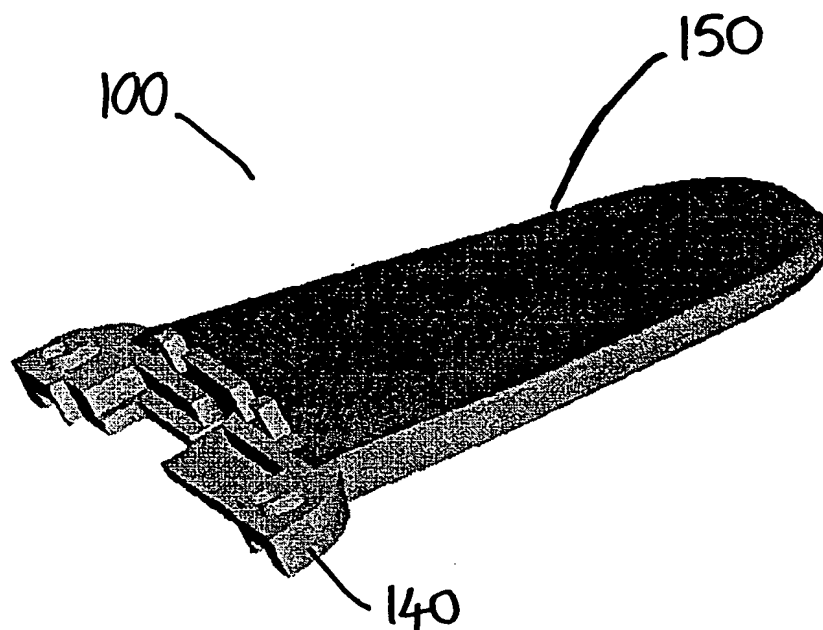


Figure 3

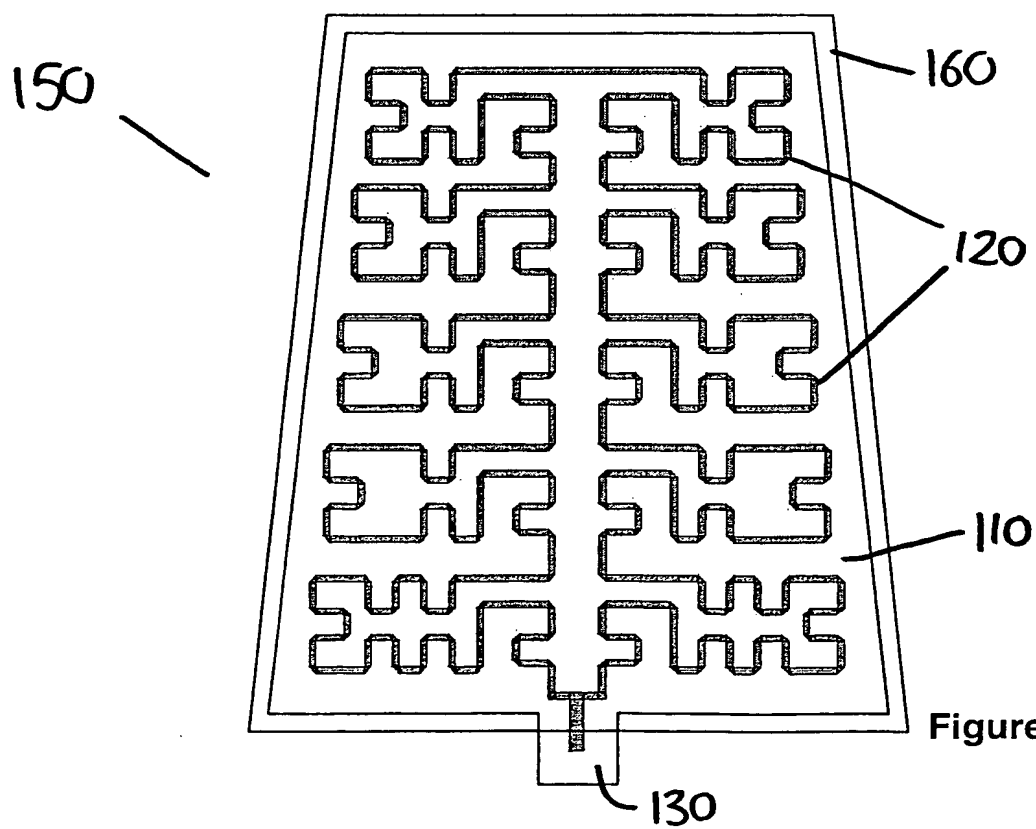


Figure 4

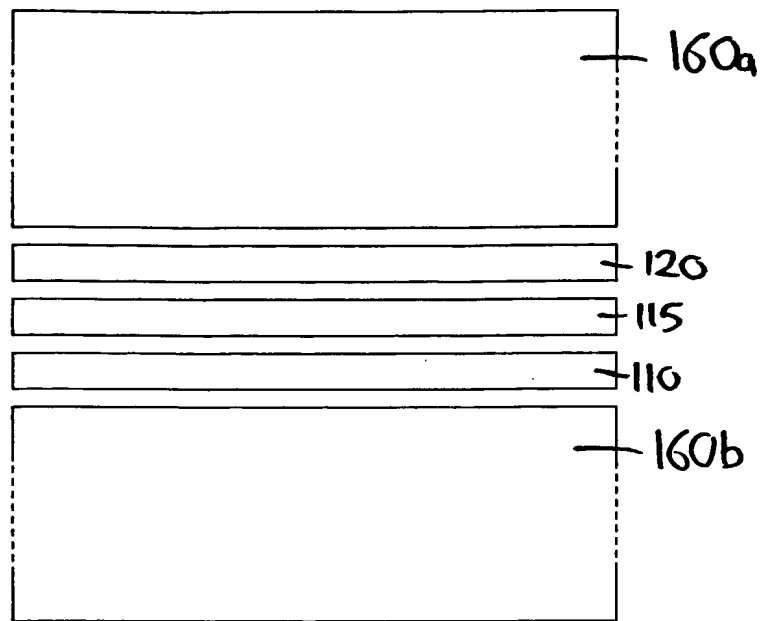


Figure 5

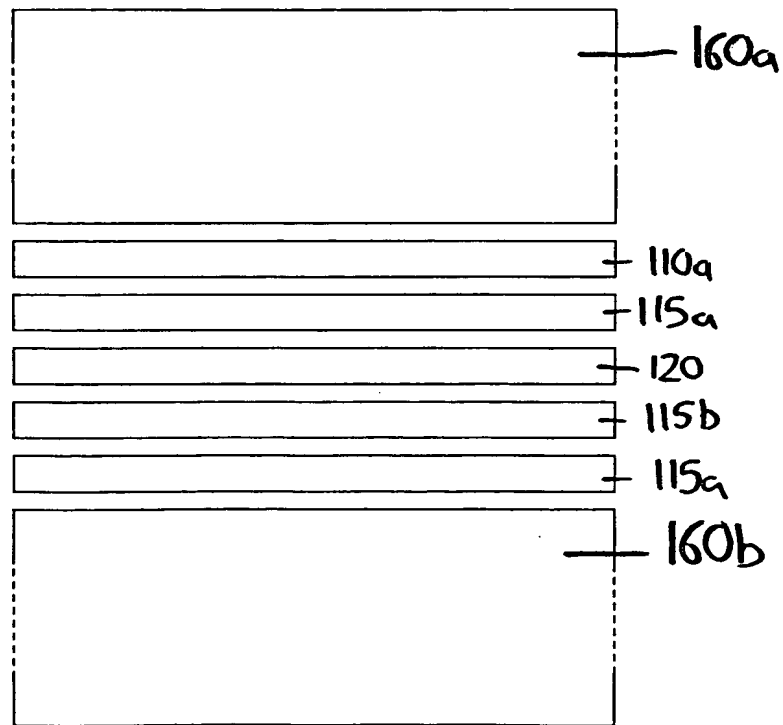


Figure 6

4
/ 4

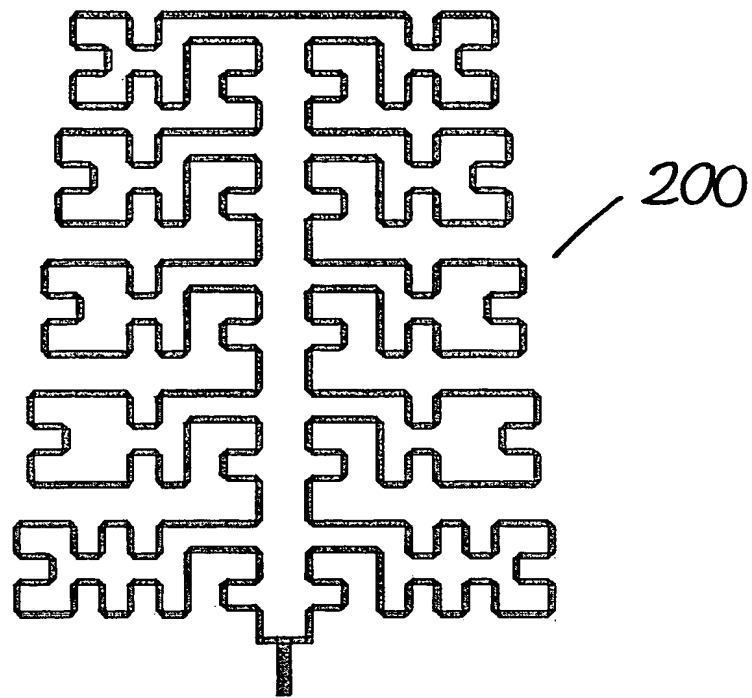


Figure 7